

CA 99/1079

4

PA 172333

PCT/CA 831966
14 DECEMBER 1999 (14.12.99)

REC'D 18 JAN 2000

WIPO

PCT

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

November 09, 1999

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 09/335,732

FILING DATE: June 18, 1999

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

L. Edelen

L. EDELEN
Certifying Officer

66/07/99
1c490 U.S. PRO
09/335732

Patent
Attorney's Docket No. 032728-001

1c490 U.S. PRO
09/335732
06/18/99

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT
APPLICATION TRANSMITTAL LETTER

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of Peter LEA for DEVICE AND METHOD FOR ANALYZING A BIOLOGIC SAMPLE.

Also enclosed are:

- ☒ 3 sheet(s) of ☒ formal ☐ informal drawing(s);
- ☒ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 is ☒ hereby made to 2,254,223 filed in Canada on November 16, 1998;
☒ in the declaration;
- ☐ a certified copy of the priority document;
- ☐ a Constructive Petition for Extensions of Time;
- ☒ One statement(s) claiming small entity status;
- ☒ an Assignment document;
- ☐ an Information Disclosure Statement; and
- ☐ Other: _____

The declaration of the inventor(s) ☒ also is enclosed ☐ will follow.

- ☐ Please amend the specification by inserting before the first line the sentence --This application claims priority under 35 U.S.C. §§119 and/or 365 to _ filed in _ on _; the entire content of which is hereby incorporated by reference.--

The filing fee has been calculated as follows [] and in accordance with the enclosed preliminary amendment:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$760.00
Total Claims	64	MINUS 20 =	44	x \$18.00	792.00
Independent Claims	5	MINUS 3 =	2	x \$78.00	156.00
If multiple dependent claims are presented, add \$260.00					
Total Application Fee					1708.00
If verified Statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					854.00
Add Assignment Recording Fee of \$40.00 if Assignment document is enclosed					40.00
TOTAL APPLICATION FEE DUE					894.00

[X] A check in the amount of \$ 894.00 is enclosed for the fee due.

[] Charge \$ _____ to Deposit Account No. 02-4800 for the fee due.

Please address all correspondence concerning the present application to:

Teresa Stanek Rea
Burns, Doane, Swecker & Mathis, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404.

The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in triplicate.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: June 18, 1999

By: Teresa Stanek Rea / T. J. Rea
Teresa Stanek Rea
Registration No. 30,427
Res. No. 28,570

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

0035732.061899
668190-25253360

Applicant or Patentee:
Serial or Patent No.:
Filed or Issued:

PETER LEA

N/A

N/A

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS (37 CFR 1.9(f) and 1.27(b)) - SMALL BUSINESS CONCERN**

As an official empowered to act on behalf of the Small Business Concern identified below:

NAME OF SMALL BUSINESS CONCERN

Biophysics Inc.

ADDRESS OF SMALL BUSINESS CONCERN

360 Great Road

Tempe, Ontario, Canada M5M 3P5

I hereby declare that the above small business concern qualifies as a Small Business Concern as defined in 37 C.F.R. § 1.9(d) for purposes of paying reduced fees to the Patent and Trademark Office under §§ 41(a) and (b) of Title 35, with United States Code with regard to the invention entitled:

DEVICE AND METHOD FOR ANALYZING A BIOLOGIC SAMPLE

described in

☒ the specification filed herewith.

☐ application serial no. _____, filed _____

☐ patent no. _____, issued _____

The above Small Business Concern has not assigned, granted, conveyed or licensed and is under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 C.F.R. § 1.9(e) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 C.F.R. § 1.9(d) or a nonprofit organization under 37 C.F.R. § 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed or licensed or am under an obligation under contract or law to assign, grant, convey or license, any rights in the invention is listed below:

☒ no such person, concern or organization

☐ persons, concerns or organizations listed below:

Full name _____

Address _____

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

Full name _____

Address _____

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in the above Small Business Concern's loss of entitlement to small entity status prior to paying, or at the time of paying, any fee due after the date on which status as a small entity is no longer applicable (37 C.F.R. § 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that those statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing therefrom, or any patent to which this verified statement is directed.

NAME OF OFFICIAL:

Peter Lea

TITLE OF OFFICIAL:

President

Signature

Date

17 June 99

658190-225566

UNITED STATES OF AMERICA

09335732-061899

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN that I, PETER LEA, of 360 Greer Road, Toronto, Ontario, Canada, MSM 3P5, a Canadian citizen, have invented certain new and useful improvements in a

DEVICE AND METHOD FOR ANALYZING A BIOLOGIC SAMPLE

of which the following is a specification.

DEVICE AND METHOD FOR ANALYZING A BIOLOGIC SAMPLE

Field of the Invention

This invention relates to a device for separating a fluid component, such as plasma, from a biologic sample, such as blood, using microspheres and
5 analyte specific labeling . This invention also relates to a device and method for quantitative determination of an amount of analyte present in biologic fluids. The invention further relates to a quantitative assay method and device for measuring one or more analytes in a biologic fluid sample using a point-of-care assay method and device. The test results can be analyzed using a suitable analyzer and, optionally, the
10 assay test results are transmitted by way of digital transmission systems to permit further evaluation of the data.

Background of the Invention

There are presently many examples of one step assays for measuring analytes in fluid. A common assay is the pregnancy test device which involves
15 contacting a urine sample with a test pad, which urine moves by capillary flow along the bibulous chromatography strips whereby the presence of human chorionic gonadotropin (HCG) will be detected usually as shown by a coloured line because of the reaction between HCG and reagents in the bibulous chromatography strips. This is an example of a chromatographic assay.

20 U.S. Patent 5,766,961 issued June 16, 1998 and U.S. Patent 5,770,460 issued June 23, 1998 are both entitled "One-Step Lateral Flow Nonbibulous Assay". "Nonbibulous lateral flow" refers to liquid flow in which all of the dissolved or dispersed components of a liquid, which are not permanently entrapped or filtered out, are carried at substantially equal rates and with relatively unimpaired flow laterally
25 through a stabilized membrane. This is distinguished from preferential retention of one or more components as would occur, for example, in materials capable of absorbing or imbibing one or more components, as occurs in chromatographic

0035732 061899 668T90-2E/5EE60

configurations. In this one-step assay, a sample (which may contain the analyte of interest) is collected on the "sample receiving zone" from which it flows to the "labelling zone" at which point it encounters a specific binding reagent for the analyte coupled to visible moieties (the "assay label"), then flows to a "capture zone" where
5 the analyte bound to visible moieties is captured.

In U.S. Patent 5,540,888 issued July 30, 1996 and entitled "Liquid Transfer Assay Devices", the invention described is a device for biochemical diagnostic assays. It comprises two liquid flow channels of porous material which transfer liquid by capillary flow to a common site following simultaneous application
10 of the liquid to the ends of the channels. The channels interconnect at a certain point and then both continue in an arrangement analogous to an electrical bridge circuit. By selecting the hydraulic resistances of the arms of this circuit, the flow can be controlled across the bridge.

U.S. Patent 5,300,779 issued April 5, 1994 entitled "Capillary Flow
15 Device" describes methods and devices for measuring an analyte in a sample mixed with reagents, the devices defining a flow path. The specific binding by agglutination may provide for changes in flow rate, light patterns of a flowing medium, or light absorption or scattering which permit measurement of the analyte of interest.

In U.S. Patent 5,110,724 issued May 5, 1992, entitled "Multi-Analyte
20 Device", the invention described is an assay device for assaying multiple analytes in a drop-sized blood sample. A dispenser distributes a small volume blood sample to multiple transfer sites by capillary flow of the blood sample through sieving and distributing matrices which separate blood cells from plasma as the sample fluid migrates toward the transfer sites. A test plate in the device carries multiple absorbent
25 pads, each containing reagent components for use in detection of a selected analyte. The test plate is mounted on the dispenser toward and away from a transfer position at which the exposed surface regions of the pads are in contact with associated sample-

09335732-061899

transfer sites, for simultaneous transfer of sample fluid from such sites to the pads in the support.

In U.S. Patent 5,039,617 entitled "Capillary Flow Device and Method for Measuring Activated Partial Thromboplastin Time", the invention described
5 measures "activated partial thromboplastin time" (APTT) on a whole blood sample by applying the sample to a capillary tract with reagents capable of initiating an APTT analysis, wherein clotting time is measured by the cessation of blood flow in the capillary tract. This is an example of a risk evaluation based on coagulation.

In U.S. Patent 4,753,776 entitled "Blood Separation Device
10 Comprising a Filter and a Capillary Flow Pathway Exiting the Filter", the invention describes a method for separating plasma from red blood cells. The driving force for the movement of plasma from the filter to the reaction area of a device utilizing the method is capillary force provided by a tubular capillary. A filter is selected from glass microfiber filters of specified characteristics.

15 The U.S. Patent 5,135,719 issued August 4, 1992, entitled "Blood Separation Device Comprising a Filter and Capillary Flow Pathway Exiting the Filter", the similar invention is described and the glass fibre filters are prepared from fibers with diameters between 0.10 and 7.0 μm .

In U.S. Patent 4,447,546 issued May 8, 1984, entitled "Fluorescent
20 Immunoassay Employing Optical Fibre in Capillary Tube", a short length of precise diameter capillary tubing with an axially disposed optical fibre to which is immobilized a monolayer of a component of the antibody antigen complex (eg. an antibody) is described. The tubing is immersed in the sample.

U.S. Patent 5,610,077 issued March 11, 1997, entitled "Processes and
25 Apparatus for Carrying Out Specific Binding Assays", describes the well known antibody binding to antigen assay. The sample which may contain the analyte (a),

09335732.061899

(the substance being tested for) is mixed with (b) an antibody which binds to the substance being tested for, which antibody is immobilized on a solid support, and (c) another antibody for the substance being tested for which is conjugated to a detectable marker, to thereby form a complex between (b), the substance being tested for and (c) and causes the marker to be immobilized and detected.

In U.S. Patent 4,943,522 issued July 24, 1990, entitled "Lateral Flow, Non-Bibulous Membrane Assay Protocols", the described invention is a method and apparatus for conducting specific binding pair assays, such as immunoassays, the test substrate is a porous membrane on which a member of the binding pair is affixed in an "indicator zone". The sample is applied and is permitted to flow laterally through the indicator zone and any analyte in the sample is complexed with the affixed specific binding member, and detected. A novel method of detection employs entrapment of observable particle in the complex, for instance, red blood cells of blood can be used as the observable particles for detection of the complex.

An example of a method to separate red blood cells from whole blood samples is found in U.S. Patent 5,118,428 issued June 2, 1992, entitled "Method to Remove Red Blood Cells from Whole Blood Samples". In the described invention, red blood cells are removed from whole blood samples with a solution containing an acid. The agglutinated red blood cells are then removed from the resulting suspension by procedures of filtration, centrifugation or decantation, leaving an essentially red blood cell-free serum or plasma sample.

In U.S. Patent 5,073,484, entitled "Quantitative Analysis Apparatus and Method", an analyte is measured along a liquid flow path which includes a number of reaction-containing reaction zones spaced apart along the flow path. Detector means are employed to detect analyte, reactant or predetermined product in the reaction zones, the number of zones in which detection occurs indicating the amount of analyte in the liquid.

09335732-061899

In U.S. Patent 5,536,470 issued July 16, 1986, entitled "Test Carrier for Determining an Analyte in Whole Blood", red blood cells cannot gain access from the blood sample application side, to the detection side and on the detection side as a result of an analysis reaction, an optically detectable change occurs.

5 A serious deficiency in current one-step assays for the measurement and/or detection of an analyte is that they provide only qualitative results rather than quantitative results. That is to say that the presence or absence of the analyte may be determined but the actual amount or concentration of analyte present in the sample would still not be known. The assay of the present invention provides quantitative
10 results as the test is performed in a determinable volume. In the prior art methods it is not possible to consistently identify the exact volume of the test sample in repeated testings since the fluids must wash through the test strips.

 Prior art methods using chromatographic strips and fiberglass strips require larger initial volumes of the biologic fluid in order to mobilize the proteins
15 and labels in the strips. This is particularly true when the biologic fluid is blood and the plasma must first be separated from the blood sample. An advantage of the device and method of the present application is that very small fluid samples can be used to measure one or more analytes. The assay method and device of the present invention is also advantageous because the test volume can be made constant and therefore
20 repeated testings will yield quantitative data which can be directly compared between samples and within a sample.

 It is an advantage of the present invention that the assay device and methodology allows for separation of the plasma from the whole blood during the assaying of a fluid sample. In other words it is not necessary to previously separate
25 out the cellular component of the blood before assaying the sample. This is a significant advantage as it allows that the assay can be used at the point of patient care, for example, by the patient themselves, at the patient's bedside or in a doctor's office. In a preferred embodiment of the present invention there is provided by the

09335732-061899

device and assay methodology of the present invention a generic point-of-care platform suitable for use in one or more diagnostic or prognostic assays performed on one or more fluid samples.

Summary of the Invention

5 In accordance with an aspect of the present invention a method for separating out the fluid component of a biologic sample using microspheres is provided. In one embodiment, the biologic sample is placed in contact with a group of microspheres and the fluid component separates from the sample as the fluid portion flows through the microspheres, by capillary action.

10 In accordance with an aspect of the present invention a quantitative assay method and device are provided for measuring one or more analytes in a fluid sample using a point-of-care assay method and device. The assay and device are designed for use by a patient themselves, at the bedside of a patient, or in a doctor's office. The test results are analyzed using a suitable analyzer and, optionally, the
15 assay test results are transmitted by way of digital transmission systems to permit further evaluation of the data by an off-site professional.

 In accordance with an aspect of the present invention, an assay method and portable assay device are provided for testing small volumes of biologic fluids, including blood, in a timely manner. In accordance with another aspect of the present
20 invention, a method and device are provided for testing samples of biologic fluids in which a consistent volume of the biologic fluid sample is tested for one or more analytes and the data generated from the tests are used for collecting and compiling in a database pertaining, for example, to a particular disease condition. Ultimately the data collected can be used to train neural network algorithms and the algorithms may
25 then be used to provide diagnostic and/or prognostic information based on the individual test results of any given test subject.

00335732 061809

In accordance with another aspect of the present invention in respect to the analysis of blood, the cellular components of blood are separated from plasma by allowing the whole blood to be exposed to microsphere beads which permit the plasma to pass in the spaces formed between the microspheres by capillary action but not the cellular component. The present invention is not limited to the separation of cells from plasma in blood but includes broader applications where microsphere beads may be used to separate a fluid component from a cellular component in a biologic fluid. The microsphere beads are effectively acting as a fluid filter.

According to another aspect of the present invention a device is provided for separating plasma from blood in a sample. The device comprises a plurality of microspheres disposed in abutting relation and forming therebetween a plurality of capillary channels, whereby when the microspheres are disposed in fluid communication with a blood sample cellular and plasma components of the biologic sample are separated by capillary flow of the plasma component through the capillary channels formed by the interstitial spacing between abutting microspheres.

According to another aspect of the present invention the device comprises a plurality of groups of smaller microspheres each impregnated with a different label and interspersed with the larger microspheres in separate zones of the larger microspheres. The microspheres may be of substantially the same diameter, or the microspheres may be of differing diameters. The size of microsphere selected may be based on the viscosity of the sample or the size of the component one wishes to exclude or separate.

In accordance with yet another aspect of the present invention, the microspheres are bundled in a fluid-permeable material or the microspheres are maintained in abutting relation by a surface tension of the fluid which passes through them, for example plasma. In accordance with yet another aspect of the present invention the microsphere beads, also known simply as microspheres, are dried on a surface of the device.

09335732-061859

In accordance with another aspect of the present invention, the device comprises a sample shelf adjacent to the fluid entrance and the microspheres are disposed on the sample shelf.

According to yet another aspect of the present invention the device
5 comprises a plurality of smaller microspheres which are impregnated with at least one label interspersed with a plurality of larger microspheres such that the smaller microspheres occupy the interstitial spacing between the larger microspheres and release a label into the fluid as it flows through the interstitial spacing between the larger microspheres. There may be a plurality of groups of smaller microspheres each
10 impregnated with a different label and interspersed with the larger microspheres in separate zones of the larger microspheres. Alternatively, the smaller microspheres may be mobilized and carried forward by the fluid as it passes along the capillary channels formed by the larger microspheres.

In accordance with another aspect of the present invention, the device
15 comprises an indicator containing patient identification information to be associated with results of the assay, for example a bar code which can be read by a bar code reader.

According to another aspect of the present invention, a method of separating fluid from a biologic sample is provided. The sample has a fluid
20 component and a non-fluid component and the method comprises the steps of,

(a) bringing the sample into fluid communication with a plurality of microspheres disposed in abutting relation and forming therebetween a plurality of interstitial spaces which connect to comprise capillary channels, and

(b) collecting the fluid component as it is separated by capillary
25 flow of the fluid component through the capillary channels. According to another aspect of the present invention there is provided, a method of conducting an assay utilizing a device comprising a capillary chamber defined by first and second opposed

09335732-061899

surfaces spaced a capillary distance apart having a fluid entrance and at least one reagent disposed within the capillary chamber, comprising the steps of,

- (a) conveying a fluid sample into fluid communication with the fluid entrance such that the fluid sample is drawn into the capillary chamber by capillary action and reacts with the reagent, and
- (b) analyzing the reagent to determine whether the reagent binds to an analyte in the fluid sample.

According to another aspect of the present invention the method further comprise the step of analyzing the reagent to determine a proportion of the reagent which binds to the sample.

According to another aspect of the present invention, the method further comprises a plurality of capillary chambers for conducting a plurality of assays on one or more fluid samples. According to another aspect of the present invention the results of the tests are recorded in a computer database and may be further applied in a trained neural network algorithm to generate a profile of one or more selected disorders. The assay further comprising the step of applying a receiver operating characteristic analysis to the data to determine a statistical significance of the data.

In accordance with another aspect of the present invention a wick or a capillary is brought into fluid communication with the fluid sample to remove the fluid sample from the capillary chamber.

In accordance with another aspect of the present invention microspheres are used to separate a cellular component from a fluid component in a biologic fluid, for example plasma from whole blood, and the fluid component can be tested in chromatography test strips. Furthermore, the microsphere beads of the present invention may be used as a labeling device, in addition to a filtration device, in standard nitrocellulose chromatography assays.

0035732.061899

Other and further details of this preferred embodiments are described in the Detailed Description of the Preferred Embodiments together with the drawings described below.

Brief Description of the Drawings

- 5 For the purpose of illustrating the invention, there is shown in the drawings a form which is presently preferred. It is not intended that this invention be limited to the precise arrangements and instrumentalities shown. The present invention will be described in detail with reference to the accompanying drawings, in which like numerals denote like parts in the several views, and in which:
- 10 Figure 1 is an schematic, exploded, perspective view of an embodiment of the device of the present invention.
- Figure 2 is a longitudinal cross section of the preferred embodiment illustrated in Figure 1 along line 1A - 1A.
- Figure 2A is an end elevation view of the device illustrated in Figure 2 taken from the perspective of line 2A - 2A.
- 15 Figure 3 is a side view of an embodiment described in Example 1 illustrating the cover slip in relation to the beads when starting to form the curl.
- Figure 4 is also a side view of an embodiment described in Example 1 illustrating the curl after formation;
- 20 Figure 5 is another side view of an embodiment described in Example 1 illustrating the position of the cover slip in relationship to the beads on the microscope slide.
- Figure 6 is a top plan view of an embodiment described in Example 1.

00335732.061890

Figure 7 is a side view of an embodiment described in Example 2 illustrating the label pad variant.

Figure 7A is a side view of another embodiment described in Example 2 illustrating the replacement of the label pad with microsphere beads.

- 5 Figure 8 illustrates an example ROC curve for the expected test results for a neural network risk analysis test.

Detailed Description of the Preferred Embodiments

- 10 The present invention relates to a method of separating a fluid component from a biologic sample using microsphere beads. The present invention further relates to a device and a method for analyzing the presence or absence of an analyte in a biologic fluid sample. The invention also relates to quantifying with precision the amount of one or more analytes present in a biologic fluid sample. The present invention further relates to an assay which can interpret test results and be used to further identify certain medical conditions from which a person or animal may
- 15 be suffering or is likely to suffer from in the future. The present invention further relates to a prognostic assay technique in which the results of the test assay defined in the present invention may be used to predict the likelihood of a person or animal developing a certain condition or disease state at a future time. These various embodiments are described in detail herein.

- 20 Although the preferred embodiments described herein are described with respect to the testing of human biologic samples it is well understood that such assays and methodologies could equally be used for assessing biologic samples in other animals. In particular the present invention would clearly have applicability to veterinary services.

00335737.061899
668190-2E/SEE60

In a biologic fluid sample having a fluid component and a non-fluid component, the fluid component containing an analyte of interest the present invention may be used to measure any of the following, alone or in combination:

- 5 a) the presence of the analyte in the sample
- b) the absence of the analyte in the sample
- c) concentration of the analyte in the sample
- d) total amount of analyte in the sample.

10 Suitable analytes which may be measured by the assay and device of the present invention include soluble analytes: including but not limited to, enzymes, proteins, bacteria, viruses, antigens, antibodies, immunoglobulins, drugs, and hormones. Other suitable analytes would be known to one skilled in the art. The assay and device of the present invention are useful for the detection and measurement of drugs of abuse in human biologic samples such as performance enhancing drugs or other street drugs.

15 Some biologic samples can be assayed without first separating out cellular components; however, for example, in the case of blood, the cellular component can interfere with the assay. In the case of biologic samples where it is necessary, or preferred, to remove the cellular component before assaying it is necessary to first separate the fluid component from any cellular components. In the case of blood, for example, it is necessary to separate the plasma from the whole blood so that the cellular components of the blood do not interfere with the testing for the analyte which is present in the plasma.

25 It is recognized in the present invention, surprisingly, the fluid component of a biologic sample can be separated from its non-fluid component by applying the sample to a grouping of microsphere beads. When the sample is applied the fluid component will flow in between microsphere beads thereby separating it from the cellular components in a simple and effective way. The beads act as a means of separating the fluid component from the non-fluid component as the fluid component moves by capillary action, through the spaces formed between the beads,

09335732-061899

when the beads are grouped together. So, in the case of blood, the plasma is separated from the cells in the blood sample. It has been surprisingly recognized in the present invention that microspheres have the ability to separate out the plasma from whole blood quickly and efficiently.

5 For the purposes of this patent application the spaces between the beads are called "interstitial spaces" or "pores". It is believed that the fluid flows by capillary action from one interstitial space to the next.

10 In the present application the flow of the fluid passing through the interstitial spaces between the beads is likened to flowing along channels formed by the spaces between the beads. The channels are referred to as "capillary" channels because it appears that the fluid flows between the beads by "capillary" action.

15 When the microspheres are grouped together small spaces, interstitial spaces, are formed between the microsphere beads. The size of the space formed between the microspheres is a function of the radius of curvature of the microspheres. The radius of curvature is, for the purposes of the present invention, the same as the diameter of the microsphere. To understand the relationship between the microsphere bead size and the pore size which is formed between the beads, it is known that the ratio of the microsphere diameter to pore diameter is approximately 1 to 0.4. In the case of separating out the plasma from whole blood, a pore size of $4T_m$ is considered
20 optimal. Therefore, the bead size for this particular embodiment should be $10T_m$. This permits an easy fluid flow (and therefore faster fluid flow) while still preventing cells from passing through the pores. The small spaces formed between the beads provide a certain capillarity when a fluid is present.

25 In the present invention the use of microspheres is an effective and inexpensive means for separating plasma from whole blood as the erythrocytes and leukocytes in the blood will stay on one side of the beads while the plasma portion of the blood sample will pass through the beads, by capillary-like action along the interstitial spaces or pores, formed between the beads. It is considered that the

09335732-061899

capillary action observed in the present invention is related to the surface tension exerted by the microspheres on the fluid so as to draw the fluid forward. As the fluid is drawn forward between the microspheres it provides the additional advantage of mobilizing any reagents present in the region of the microspheres. For example, the
5 microsphere layer could be impregnated with secondary antibodies or another detection molecule.

The microsphere beads are effectively acting as a fluid filter and as such can be used at any point in an assay where simple fluid filtration is required. Since it is believed that the microspheres act to filter the fluid component from the
10 non-fluid component by capillary action, the microsphere filter may be termed a capillary filter and this term is used for that purpose herein.

The microspheres could have analyte specific antibodies bound to them, for example, by adsorption or coupling. As the fluid containing the plasma passes through the capillary channels formed by the microspheres the analyte will
15 mobilize the secondary antibodies contained on the microspheres and then react with the primary antibodies contained in the biochip. However, the microspheres may act solely to separate the cellular component from the fluid component and the microspheres need not be labeled with antibodies.

Prior art technology has used chromatographic paper or other fibrous
20 material to wick the fluid component of a biologic sample away from the cellular component in order to perform tests on the fluid portion without interference from the cells or other substances present in the sample. The microspheres of the present invention provide an advantage over the prior art technology because it provides improved fluid flow without restriction by the fiber which is present in the
25 chromatographic paper. The microspheres provide a further advantage in that they provide an excellent surface for binding of proteins such as antibodies or other suitable labels.

09335732-061899

The size of the microsphere beads used to separate the fluid component can be varied based on the viscosity of the sample. Larger beads should be used for more viscous samples for faster fluid flow between the beads. Also, beads of different colours may be used to facilitate visualization of the beads when they are used as labels and bind to the analyte. The bound beads also serve to increase the density of any bound analyte for subsequent detection by a spectrometer. The regular pattern of the beads also means that diffraction difference could be used for detecting and measuring bound analyte.

The biologic sample may be applied to the top of the beads or at the side of the beads.

In a preferred embodiment latex microsphere beads are used such as those sold under the trademark Bang's™. The beads are supplied in a liquid suspension. The beads can either be kept moist or dried when used for other types of beads could be used in the invention, including glass, so long as the beads separating out the fluid component.

The use of microsphere beads to quickly separate out a fluid component from a biologic sample can be incorporated into assays for detecting and quantifying analytes present in the sample.

According to one aspect of the present invention this method of separating out a fluid sample from a biologic sample using microsphere beads is incorporated into a one-step assay for analyzing one or more analytes which may be present in the fluid sample is provided. The assay is performed in association with a chamber of defined volume. In a preferred embodiment the chamber comprises microsphere beads for separating out the fluid sample and detection means for detecting and/or measuring an analyte in the sample. The detection means may be drawn from any of several known methods for detecting an analyte in a sample. For example the analyte may be recognized using detection protein, such as an antibody or antigen, which is specific to the analyte. When the analyte binds to the detection

00335732-061899

protein it changes density and may be measured. Alternatively, the detection protein may be bound to another label, which can be detected. For example the detection protein may be attached to a small bead so that when the detection molecule binds to the analyte the density will increase and this can be detected or measured. Other
5 suitable labels would include metals such as gold, fluorescent labels, chemical labels, or colorimetric labels.

In accordance with an aspect of the present invention, this invention pertains to a point-of-care diagnostic or prognostic test in the form of a small chip or cassette for use in assaying biologic samples such as blood. The
10 present invention teaches a small, compact assay device referred to as a "biochip" for a simple assay taught in accordance with the present invention.

In the device of the present invention there is a pairing together of two carrier surfaces in order to define a specific volume in which a quantitative measurement of analyte(s) present in a drop of blood, urine, saliva or other biologic
15 fluid may be measured. In a preferred embodiment the surfaces in question are a coverslip and a microscope slide but the present invention is not intended to be limited to only these specific embodiments. An important aspect of the present invention is the fact that a fluid sample enters a space of defined volume by capillary action. The defined space is therefore referred to herein as a capillary chamber. In the
20 case of a microscope slide and coverslip the capillary chamber is that volume of space between the bottom of the cover slip and the top of the slide.

In accordance with a preferred embodiment of the present invention, the amount of fluid which is present between the plates or slides is determined by the volume of space between the slides. Therefore small test systems can be designed
25 which allow for precision testing of very small volumes, in some cases, as small as a few microliters.

In order to quantitatively measure the concentration of an analyte in a sample and to compare test results from one test to another it is advantageous to have

00335732 061899
668790 2625560

5 a consistent test volume of the fluid sample each time the assay is performed. In this way the analyte measurement is assessed directly without having to adjust for varying volumes. The concentration or quantity of analyte can be assessed directly without difficulty and with consistency from test to test. The chamber of the biochip of the present invention provides that defined volume.

10 In accordance with one aspect of the present invention the fluid volume in which the measurement of an analyte is performed is standardized. In accordance with another aspect of the present invention a method is provided for separating the plasma from the blood cells in a very small blood volume since it is most practical to be able to perform these tests with only a droplet of blood, for example from a finger prick, rather than requiring a larger volume only available by taking a tube of blood through a needle.

15 In one preferred embodiment the biochip test devices comprises a chamber of a determinable volume. The chamber is defined by first and second opposed carrier surfaces. The surfaces are positioned so that they are separated by a distance which is sufficiently narrow to permit fluid to flow between the two surfaces by capillary action. The chamber has a defined volume as it forms a defined space. The chamber has one or more points of fluid entrance which allow a fluid sample to enter. In this application, the chamber is also referred to as a capillary chamber since
20 the fluid enters by capillary action.

For the purposes of the present invention this arrangement of the two carrier surfaces joined together is referred to as a "biochip" but may also be known as a cassette or cartridge.

25 The intention is to provide a compact, portable test system which may be standardized. In a particularly preferred embodiment the bottom surface is, for example, a microscope slide and the top surface is a microscope coverslip. Microscope slides and coverslips are readily available and therefore are useful carrier surfaces. In another example two microscope slides could be mounted one on top of

00335732.061899
1658190.22/5EE60

the other, or any two plates, so long as there is a defined space between the plates of a determinable volume into which a fluid sample flows by capillary action.

Once in the capillary chamber, the fluid sample is retained by way of surface tension at the ends and edges of the two surfaces. The device is of a small size which makes it portable and it can be inserted into an analyzer and reaction products between the analyte and detection molecules are measured using the analyzer. For the purposes of describing certain preferred embodiment the carrier surfaces will be referred to as plates; however, the invention is not to be limited only to flat plates. Similarly, all types of surfaces which are able to bind proteins, antigens and other detection molecules are contemplated with the scope of the present invention. Specifically the composition of the carrier surface includes, but is not limited to, glass, plastic and metal.

In a preferred embodiment of the present invention a drop of biologic sample is placed on the top surface of the microscope slide and, before entering the capillary chamber, the cellular component of the sample is removed by movement of the fluid component through a grouping of microsphere beads. For example, in the case of blood, the plasma is separated from the cellular component of blood by movement through capillary channels formed by interstitial spaces between the beads and then the fluid enters the testing chamber in which the analyte reacts with reagents in the chamber and the reaction product is a measure of the analyte present in the sample.

Once the fluid has entered the defined space it is exposed to one or more reagents present on an interior face of a carrier surface. The reagents are therefore exposed in the capillary chamber and available for reacting with one or more analytes which may be present in the fluid sample which ultimately fills the capillary chamber. The reagents are labelled and the quantity of analyte present in a fluid sample is measured based on a reaction product which results from the interaction of the analyte in the sample with the reagent in the chamber. The test results are then compared to standard calibrations to determine the quantity of analyte present in the

0935732.061899

sample. In a preferred embodiment of the present invention the reagent is one or more analyte specific antibodies which are adhered to the carrier surface, preferably by protein printing.

Alternatively, in another embodiment, an antigen is present on an interior face of the carrier surface and the amount of antigen specific antibody in the sample is measured. When bound to the carrier surface the protein or other detection molecule will project into the defined space where it can react with the analyte in the sample. The detection molecule which is present on the interior face of the carrier surface may be bound to the surface by any one of several means known to a person skilled in the art.

Detection molecules are either coated, printed or otherwise bound to one plate or the other using one of several techniques well known in the art. Numerous techniques for immunoassays are known to persons in the art and are described, for example, in "Principles and Practise of Immunology" (1997), C.P. Price and D.J. Newman eds. (Stockton Press) and this document is hereby incorporated by reference into the instant patent application and made a part hereof as if set out in full herein.

The distance between the two plates is limited only by the ability of the plates to effectively draw a fluid such as plasma between the two plates by capillary action and to retain the fluid in the defined volume. The size of the plates used would also be dictated by practical considerations such as the desired volume for testing. Plates of larger surface areas would yield higher volumes.

In accordance with the present invention a fluid sample such as a drop of blood is placed at one edge of the two plates and is drawn into the space defined between the plates. A fluid sample could be drawn against the edge of the two plates by any number of means which would be known to a person skilled in the art. In its simplest form the sample could be brought directly to touch the edges such that a portion of the fluid sample is drawn into the space so as to completely fill the defined

09335732-061899

volume of the space. For example by touching the patient's finger to the plate. It is important in the present assay that the sample always fill the defined volume entirely so that suitable quantitative analysis may be performed. In a standardized model the volume would be consistent from one biochip to another.

5 In another preferred embodiment the plates are joined together such that the fluid sample may be readily removed. For example, at the end opposite the point of fluid entry.

10 In another example, the space between the two plates could be divided into lanes and the volume of each lane would similarly be known. This approach would allow multiple tests to be done on a single sample.

15 When dealing with a blood sample in which one wishes to measure a plasma protein it is necessary to separate the plasma from the cells. In the present invention it is desirable that the test results be made available in a short time frame, preferably on the order of 1 to 30 minutes, from beginning to end. An advantage of the present invention is that the fluid sample enters the test chamber in a shorter time than prior art assays since the use of microsphere beads to separate the plasma from the blood sample, for example, eliminates the delay which would occur using fiberglass or chromatographic strips. Cumbersome equipment such as a centrifuge is not required for cell separation. All of which facilitates the test being performed at
20 the point-of-care.

 The present invention has further advantages over the prior art since the biochip device of the present invention permits several assays to be performed on one sample. This facilitates the speed with which test results can be obtained and minimizes the amount of sample required for testing.

25 Analyte-specific antibodies themselves may be labeled with anyone of several labels known to persons skilled in the art of such assays. Examples of preferred labels include fluorescent labels, colorimetric labels, another microsphere, gold particles or any high contrast molecule. Other labels would be suitable so long

09335732.061899

as the presence of the label can be detected. Similarly microsphere beads having a diameter which is smaller than the test beads can be used so that the smaller beads are mobilized through the larger beads with the movement of the fluid sample (e.g. plasma). The smaller beads can be labeled accordingly.

5 When the fluid sample containing the analyte enters into the defined space between the two plates a further antibody-antigen reaction may occur. In the present invention the upper plate, for example a coverslip, has analyte-specific reagents bound on the surface which comes in contact with the fluid. In a preferred embodiment of the present invention the analyte-specific reagents are printed on the
10 interior surface of the carrier plate using a protein printer. Suitable protein printing devices are well known in the marketplace. These include ink jet, spray, piezo-electric and bubble jet protein printers. The piezo-electric printer is preferred. The analyte-specific reagent acts as a detection molecule, typically proteins. These molecules adhere to glass, metal and plastic surfaces. Preferred surfaces include
15 polystyrene or polypropylene. The use of such printing devices is advantageous in the present invention to allow several different analyte-specific detection molecules to be printed onto the plate or coverslip such that different "lanes" are defined and different analytes may be assessed simultaneously using a single fluid sample. Additional background and calibration lanes can be provided in the same test chamber.

20 After the analyte reacts with the analyte-specific detection molecule a measurable reaction product will be produced. It is preferred that the biochip carrier surfaces be colorless or transparent such that a colorimetric, or fluorescent or other reaction products can be read using a suitable spectrometer or other appropriate detection coupled to a reader. When the analyte and analyte-specific detection
25 molecule react together there is a change in density in the reaction lane. In a preferred embodiment of the present invention, the change in density is measured to determine the amount of analyte present in the sample. In order to reduce the background noise and therefore increase the sensitivity of the assay a mask is provided in accordance with a preferred embodiment of the present invention. Referring to Figure 1 the mask

06335732-061899

32 is made of an opaque material except for the openings 36, 38 and 40 which correspond to lanes 26, 28 and 30 on the plate. The mask is designed to fit neatly over the upper plate 10 so that only the lanes themselves are available to be read. The use of the mask has the advantage of reducing the amount of background noise and setting
 5 baseline values when reading the density change in the lanes.

In a preferred aspect of the present invention, the biochip is designed to be read by a portable spectrometer which reads for example, the change in color after the analyte has reacted with the labeled antibody. The spectrometer could also read changes in density, film thickness, mass absorption or diffraction depending on the
 10 test reagents used. Once the analyzer, e.g. spectrometer, has performed the necessary data calculations the results are transmissible by digital transmission over the telephone lines or other computer network system. Alternatively, changes occurring during an antibody/analyte reaction may be detected or measured by changes in radio frequency if a radio frequency sensor is incorporated into the biochip detection
 15 system.

Turning to the figures, Figure 1, a preferred embodiment of the biochip of the present application is illustrated in a schematic exploded perspective view. Two carrier plates 10 and 12 are provided. The two plates define a fixed volume therebetween as indicated by reference number 14. Lower plate 12 may be
 20 longer than upper plate 10 to provide a shelf which acts as an application zone 16 upon which a biologic sample 18 may be applied. A shelf is not essential to the invention but provides a place to allow the sample to be separated by the microsphere beads. It is possible that the beads could be placed at the entrance of the capillary chamber 14 within the confines of the plates and the sample would be applied to the
 25 edge of the biochip where it would enter the chamber by capillary action.

Also affixed to application zone 16 is a collection of microsphere beads 20 which may or may not also include a label zone 22. The microsphere beads 20 may be grouped or bundled using a fluid-permeable material. For purposes of the schematic illustration, in Figures 1 and 2, the microsphere beads 20 and label zone 22

09335732 061899
 668190 2275560

are illustrated as separately defined regions; however the microsphere beads may also bear the label themselves and in this embodiment the two zones would converge into one with the microsphere beads playing two roles: separation of the fluid and displaying a label to which the fluid is exposed.

5 More than one size of microsphere beads may be present. In one embodiment, smaller microspheres could nestle in the interstitial spaces formed by the larger beads. The smaller beads could carry secondary labels which would bind to the analyte as it passes through the beads. Either the label would bind to the analyte in the fluid or the label attached to the small bead would attach to the analyte in the fluid
10 and the small beads would then travel with the fluid into the capillary chamber. At the same time any cellular component in the fluid sample would not pass through the microsphere bead filter.

A patient ID may be affixed to either plate 10 or 12 so long as it does not interfere with the test detection areas on the biochip or with reading the biochip
15 after analyte has reacted with the substance bound to the carrier plate surface. The plates 10 and 12 are preferably colorless and/or transparent.

Three detection areas 26, 28, 30 are printed on the inner surface of carrier plate 10: a calibration print zone 26, a detector print zone 28 and a baseline print zone 30. Three detection areas, or zones, are depicted for example only to
20 illustrate how one test biochip may be set up; however, several lanes may be present and the number of lanes dedicated to calibration and/or background can vary depending on what is being tested.

The test need not be limited to only three lanes. Several lanes could be defined. In a preferred embodiment of the present invention three lanes are printed on
25 the one plate to permit assessment of background readings as well as calibration of the biochip. It is understood that the background and calibration detection zones need not all be placed on the same biochip. It is advantageous to have the background and

00335732.061699

calibration readings made on the sample carrier plate in the same assay as the test analyte thereby reducing the variance in test results.

A background mask 32 is optionally provided. The mask is designed to cover the outer surface of the carrier plate 10 without blocking the coated or printed detection zones/lanes. Therefore, openings 36, 38 and 40 are, for example, present in the mask to reduce background interference when reading test results. The background mask is made of an opaque material with openings 36, 38 and 40 which correspond to the detection zones 26, 28 and 30 identified on the inner surface of the upper plate. The opening 40 in the mask need not have a corresponding test zone 30 as illustrated so long as the opening 40 is exposed to a part the plate 10 where reagents are not present.

Although Figure 1 illustrates both an antibody/label zone 22 and a microsphere zone 20, both of these zones are optional depending on the type of test one chooses to conduct. When fluid sample 18 is applied to application zone 16 it flows through antibody/label zone 22 (if present) and microsphere bead zone 20 (if present) before it reaches the edge 34 where the two plates 10 and 12 first meet. In the schematic illustration of Figure 1 there is a gap between the zone of microsphere beads and the fluid entry point identified by edge 34. Although this arrangement of the invention will work, it would be most preferred if the microsphere bead zone 20 and/or label zone abutted against the edge 34 of the carrier plate 10. One example of such a configuration is illustrated in Figures 5 and 6. This configuration provides the least distance for the fluid sample to travel and this further minimizes the amount of fluid sample required for testing and is described in greater detail in Example 1.

The fluid sample is drawn under edge 34 into the chamber 14 which defines a known volume. The fluid sample should be of sufficient volume to pass along the application zone 16, through the microsphere and label zone(s) and to completely fill the chamber 14. The biochip of the present invention can be scaled to a small size such that a single drop of blood could be a sufficient sample size for testing. Many dimensions are possible to construct based on the principles taught

00335732-061899

herein. Although dimensions of 1 cm x 3 cm make a device of convenient size, the nature of the testing to be done would dictate the optimum chip size. As illustrated in Figure 1 a shelf portion 16 extends on the bottom plate. On this shelf portion the biologic sample can be applied. In other embodiments, the portion of the test which is held, for example the microscope slide, may be large but the test assay itself which sits on the slide may be very small. The assay may be miniaturized to accommodate sample fluid volumes as small as about 1 microlitre.

Figure 2 is a sectional view taken along lines 2 - 2 illustrating the same elements as referenced in Figure 1. Figure 2A is an end elevation view of Figure 2 along lines 2A - 2A illustrating that the end of the device may be open, to allow the fluid to be removed from the chamber. One would want to remove fluid from the chamber, for example, is you wanted to test the whole sample. A suitable wicking material would be applied to the open end and the fluid would be drawn through thereby allowing additional fluid to enter the chamber. This could be either a continuous or a discontinuous process.

Illustrated in all of Figures 1, 2 and 2A is a spot of glue 58 which is one way to hold the plates 10 and 12 together. The glue 58 also illustrated in Figure 6, another embodiment of the invention.

Figures 7 and 7A are illustrations of another use of the microsphere method of separation in a one-step assay. In this embodiment the microspheres are used in conjunction with chromatography paper. The biologic sample 18 is placed on a surface such as a microscope slide 52'. It may be placed directly on the microsphere beads 50 (as illustrated) or beside them. The fluid component of the sample then flows through the beads 50 separating from a non-fluid component present in the sample 18. The beads abut against or sit close to a fiberglass filter pad 60 which abuts with a label pad 62. The label pad 62 is usually a fiberglass pad impregnated with the label of interest for labeling analyte in the fluid sample. The fluid flows through the filter 60 and label pad 62. Any analyte present in the fluid will be labeled as it flows through the label pad. The fluid then flows into the nitrocellulose

09335732-061899

chromatography strip 64 where the test results are read, usually as a color change or band on the nitrocellulose strip. Alternatively, since the microspheres 50 are used as a filter, the fiberglass filter 62 may be eliminated entirely (not illustrated).

5 Finally, as illustrated in Figure 7A, the fiberglass label pad 62 may be replaced by microsphere beads 66. In this case the beads 66 are acting as a source of label, not as a filter and the fiberglass filter 60' serves as a spacer between the two sets of beads 50 and 66, respectively. For applications where filtration of a fluid component is not required, the microspheres 66 can be used to label an analyte present in the fluid directly, without requiring the microsphere filter 50 or the fiberglass
10 spacer 60'.

Figures 7 and 7A are illustrative of how current assay methodologies may be modified using the microsphere bead technology of the present invention as taught herein.

00335732-061899

15 The assay device and techniques of the present invention are very useful in that they can be used for small volumes of many kinds of fluid samples. Although the description refers specifically to proteins any number of other marker would be suitable so long as a labeling system can be devised for the detection and measurement of the marker in the system. For example, the present invention could be used to measure and/or detect the presence of microorganisms such as bacteria,
20 viruses, fungi or other infectious organisms. The biochip device of the present invention can be calibrated for the type of assay and the type of analyte so that a table of standard values may be constructed. The assay system or the present invention can detect the levels of a particular hormone or even the amount of a drug in a patient's system and this standardized data can be used to make diagnostic and/or prognostic
25 determinations for a given individual.

Once the table of standard values is constructed data is collected on a regular basis and databases constructed based on the patient's medical history, current health and the test results. Optionally, the data can be transmitted by digital

transmission systems over a computer network via modem, the internet, cable lines, telephone lines, satellite or other similar technology. These databases can be used in the development of neural network algorithms, for assessment of current patient test results and diagnoses as well as for predicting certain health outcomes for a given individual. One example of a neural network algorithm is found in Example 3 below and a sample Receiver Operator Curve (ROC) is illustrated in Figure 8.

The development of the algorithms for the applied neural network will be a function of the medical condition being assessed. Large amounts of patient data will first have to be accumulated in order to have reliable predictive outcomes. The neural network can be trained to recognize the concentration of analyte which is diagnostic or prognostic, using the standardized assays of the present invention. The data and algorithms are encoded in an electronic chip which is placed in the reader, for example a spectrometer, such that the printout from the reader will also identify a particular diagnosis or prognosis simultaneously with providing the test result. In the neural network algorithms, the diagnostic or prognostic test result will be optimized as the number of data points increases. With more patient data the predictive and/or diagnostic result will be made with greater certainty. The percent certainty can be calculated and provided to the physician or technician based on analysis of the measured data in comparison to a database contained in an electronic memory chip installed in the analyzer provided. Present technology makes it possible to display the actual standard curve on the reader itself at the time of printing out the test results.

In addition to the use of a spectrophotometer, and in accordance with another aspect of the invention, the biochip has a radiofrequency sensor incorporated into the carrier plate 10. When a reaction takes place in one or more detection areas a measurable change in radio frequency occurs and by detecting this change in radio frequency the presence or the absence or even the extent of a reaction can be measured or detected using a suitable device for detecting radio frequency changes.

09335732-061899

In the present invention, more than one test can be run simultaneously on the same biochip and therefore the certainty of the diagnosis or prognosis can be improved. As the number of markers increases so does the certainty of measurement.

One of the many examples of uses of the biochip/cassette of the present invention is to measure blood proteins indicating peripheral vascular disease using a drop of the patient's blood.

Further details of the preferred embodiments of the invention are illustrated in the following Examples which are understood to be non-limiting with respect to the appended claims.

10 Example 1: Verification of Plasma Flow and Separation from Whole Human Blood

As illustrated schematically in Figures 3 to 6, approximately 15 microliters of 10 micrometer latex microsphere beads (Bang's™) 50 were dropped onto a glass slide 52 and allowed to dry. A glass coverslip 54 was placed on the slide and pushed, on edge, towards and along, the dried beads. The cover slip caused the dried beads to be separated from the glass slide and further caused the collection of dried beads to roll over thereby forming a curl 56. The cover slip was then placed on the slide with the "curl" touching the edge of the coverslip (illustrated in Figures 5 and 6). The coverslip was fixed squarely in place on the slide with one edge aligned parallel to the edge of the curl of dried beads and this edge was left open to allow fluid to pass through the beads and into the capillary chamber formed between the cover slip and the glass slide. The coverslip was attached with nail polish at the corners 58 of the coverslip to secure it to the microscope slide. The coverslip was secured at a spot where no capillary action was intended to take place to permit fluid to flow freely under the coverslip.

25 A 20 microliter drop of whole human blood 18 was placed on the remaining 5 to 10 microliter microsphere beads. In other words, the sample of whole human blood was placed on the remaining portion of the beads which did not form

00335732-061899

part of the curl leaving the plasma component free to move by capillary action through the curl portion of the microsphere beads and into the space defined between the coverslip and the slide (i.e. the capillary chamber). The effect was observed under a binocular light microscope. Upon application of the blood sample to the beads the plasma immediately began to separate from the whole blood. As the curl became plasma soaked, capillary action between the coverslip and the slide drew the pure, clean, cell-free plasma under the coverslip into the chamber defined between the coverslip and the slide. This chamber defines a known space, the volume of which can be calculated and predetermined.

10 This demonstrated that the microsphere beads are able to readily and effectively separate plasma from whole blood and to pass, via the capillary channels formed between the microsphere beads, into the capillary chamber.

Example 2: Microsphere Separation Combined With Chromatography Strip

15 In an assay for an analyte in a human blood sample, this example (schematically illustrated in Figure 7) demonstrated the use of microsphere separation of plasma from a blood sample of human whole blood. The plasma was separated using latex microsphere beads (Bang'sTM) 50 and then drawn into a standard nitrocellulose chromatography strip.

20 The fiberglass pads, which are usually used to retain red blood cells in the prior art, were replaced with about 20 microliters of 10 micrometer latex beads. A drop of human blood (about 60 microliters) was placed on a surface 52', in contact with the latex microspheres. The fiberglass pad 60 effectively functions as a spacer between the beads 50 and the label pad 64 although it could also be used as a second filter. The fiberglass filter 60 may be eliminated entirely and the microsphere beads 25 50 abut directly with the label pad 64 (not illustrated).

It was observed that the blood soaked the bead pile and within about 2 minutes clear plasma ran onto the nitrocellulose chromatography strip. This was observed with the visible eye and also under a microscope. This example

00335732.061899
1658190.2E/EE60

demonstrated that the microsphere method for separation of plasma from blood can also be used in conjunction with a standard nitrocellulose chromatography strip. For tests using such chromatography strips this is clearly an advantageous methodology for separating plasma from blood.

- 5 Illustrated in Figure 7A is another embodiment where, instead of a fiberglass label pad 62, microsphere beads 66 are used as the label region of the test device. The fiberglass filter pad 60' is used as a spacer between the two sets of beads, 50 and 66.

Example 3: Neural Network Marker Analysis

- 10 A neural network is a mathematical function $N(W,a)$ which takes input analyte vectors $a=(a_1,a_2,...,a_n)$ and outputs numbers between 0 and 1. The weight parameters W are adjusted during the training period, using training patterns $\{p=(b_1,b_2,...,b_n,T)\}$ where $b_1,...,b_n$ are training protein vectors, and T is the target output value. In the case of a coagulation test, T would be 1 for coagulation, and 0 for
- 15 a non-coagulation.

The parameters W are adjusted to minimize the error $E = \sum_p (N(W,a) - T)^2$ while maintaining good performance on new test data.

- 20 Once the Network is trained, a network cutoff C is chosen to classify test data. Let $TST(C,b,T)$ be the test result for a testing vector a , given cutoff C , and target output T .

$$TST(C,b,T) = \begin{cases} 1 & \text{if } N(a) > C \\ 0 & \text{otherwise} \end{cases}$$

- 25 Now, we can analyze the sensitivity and specificity of the test.

True Positive if $T=1$ and $TST(C,b,T)=1$

False Positive if $T=0$ and $TST(C,b,T)=1$

00335732.061899

True Negative if $T=0$ and $TST(C,b,T)=0$

False Negative if $T=1$ and $TST(C,b,T)=0$

Sensitivity = $TP/(TP+FN)$


Specificity = $TN/(TN+FP)$

- 5 Plotting sensitivity versus 1-specificity for various cutoffs gives a ROC (receiver operator characteristic) curve.

NEURAL NETWORKS

- We start with a set of training patterns $\{ p=(I_1, I_2, \dots, I_n, TAR) \}$, where I_j is an input value, and TAR is the target value ($TAR=0$ or $TAR=1$). We want to
10 train a neural network to give outputs which are close to the target values.

A neural network has 3 layers; the first INPUT layer, the second HIDDEN layer, and the third OUTPUT layer:

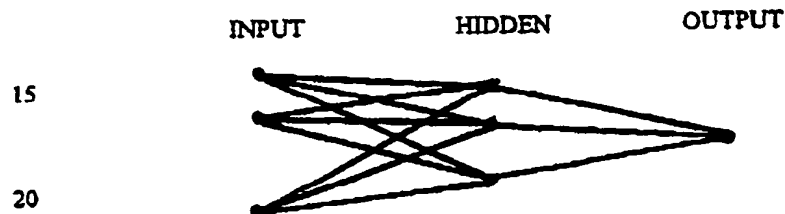

- The neurons are connected by a set of weights $\{ w(i,j,k) \}$. For
25 example, $w(1,2,4)$ connects the second neuron of the first layer with the fourth neuron of the second layer.

For each pattern we assign a number called the activation to each neuron, which measures the probability that it is firing. The activation is defined recursively as follows:

- 30 $\{I_j \text{ if } i=1$

$$a(i,j) = \{ \\ \{ 1 / (1 + \exp (- \sum(k) \{ w(i-1,k,j)a(i-1,k) \})) \}$$


The error is calculated as

$$ERMS = \text{SQRT} \{ \sum \{ (t - a(2,1))^2 \} \}$$

5 where the sum is over all patterns.

The weights are adjusted to minimize ERMS, while maintaining good performance on new data.

09335732-061899

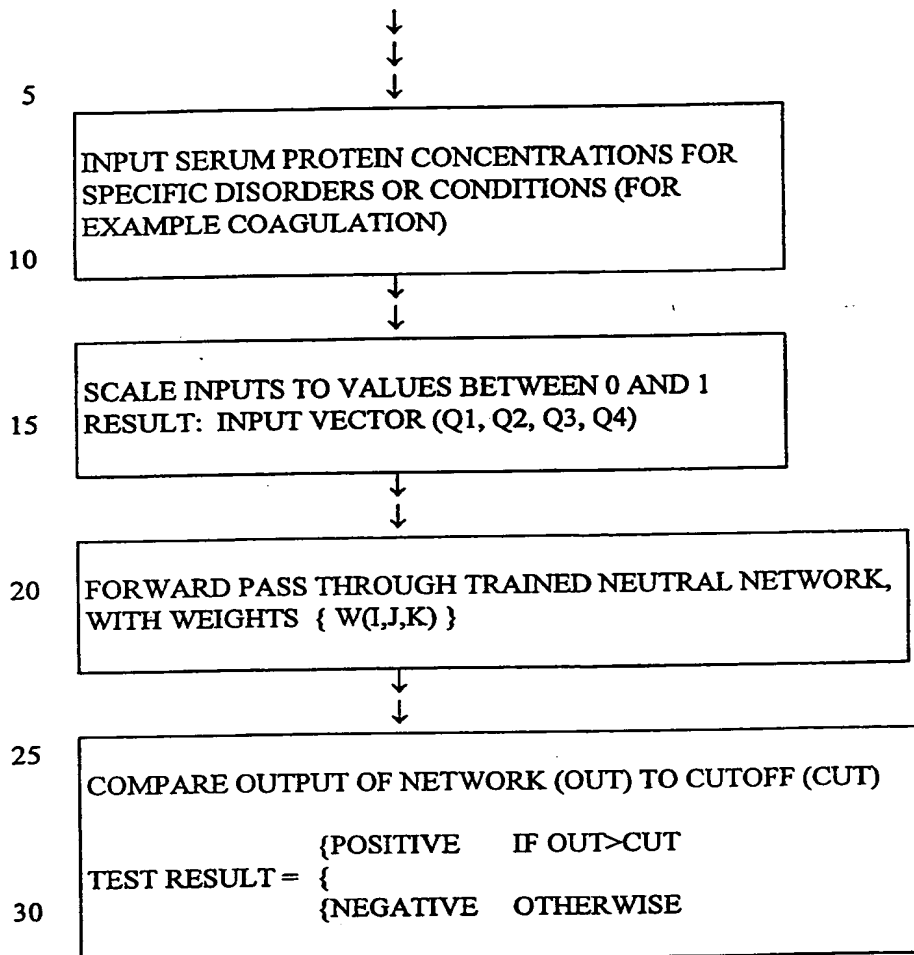QUANTITATIVE FLOW CHART

Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, many equivalents to the embodiments of the invention described specifically above. Such equivalents are intended to be encompassed in the scope of the following claims.

I CLAIM:

1. A device for separating fluid from a biologic sample, the sample having a fluid component and a non-fluid component, the device comprising a plurality of microspheres disposed in abutting relation and forming interstitial spaces therebetween such that the interstitial spaces connect to form a plurality of capillary channels, whereby when the microspheres are disposed in fluid communication with the biologic sample, the non-fluid component is separated from the fluid component by capillary flow of the fluid component through the capillary channels.
2. The device of claim 1 wherein a plurality of smaller microspheres are interspersed among a plurality of larger microspheres, the plurality of larger microspheres are disposed in substantially abutting relation forming interstitial spaces therebetween such that the interstitial spaces connect to form a plurality of capillary channels, the plurality of smaller microspheres are sufficiently small in size such that they can occupy the interstitial spaces formed by the larger microspheres and move through the capillary channels and are carried forward by the fluid component as it flows through the capillary channels.
3. The device of claim 2 wherein the smaller microspheres are labeled with at least one label.
4. The device of claim 3 wherein the label is selected from the group consisting of radioactive labels, florescent labels, metals, proteins, peptides, antigens and antibodies.
5. The device of claim 3 wherein the biologic fluid contains an analyte and the label is an antibody have a specificity directed to the analyte.
6. The device of claim 2 wherein the plurality of smaller microspheres further comprises a plurality of groups of microspheres each group impregnated with

09335732-061899

a different label and each group interspersed among the larger microspheres in a separate zone of the larger microspheres.

7. The device of claim 1 wherein the microspheres are of different diameters.
8. The device of claim 1 wherein the microspheres are of substantially the same diameter.
9. The device of claim 1 wherein sizes of the microspheres are selected according to a viscosity of the sample.
10. The device of claim 1 wherein the microspheres are bundled in a fluid-permeable material.
11. The device of claim 1 wherein the microspheres are maintained in abutting relation by a surface tension of the fluid or by drying the microspheres.
12. The device of claim 1 comprising fluid-conveying means for conveying the sample into fluid communication with the microspheres.
13. The device claim 1 wherein the biologic sample is blood and the fluid component is plasma.
14. An assay device comprising, in combination,
at least one chamber defined by first and second opposed surfaces spaced a distance apart the distance being such that fluid is drawn into the chamber by capillary action, and having a least one fluid entrance through which the fluid is drawn into chamber, and at least one reagent disposed within the chamber, whereby a fluid sample conveyed into fluid communication with the fluid entrance is drawn into the capillary chamber by capillary action to thereby substantially fill the capillary chamber with a predetermined volume of the fluid sample.

09335732-061899

15. The assay device of claim 14 comprising fluid-conveying means for conveying the sample into fluid communication with the fluid entrance.
16. The assay device of claim 14 for analyzing a biologic sample, the sample having a fluid component and a non-fluid component, in which a capillary filter comprising a plurality of microspheres arranged in abutting relation and forming interstitial spaces therebetween, such that the interstitial spaces form a plurality of capillary channels, is disposed in fluid communication with the fluid entrance to the chamber, whereby when the microspheres are disposed in fluid communication with the biologic sample, the non-fluid component is separated from the fluid component of the sample by capillary flow of the fluid component through the interstitial spacing between abutting microspheres and the fluid component is drawn into the fluid entrance to thereby fill the capillary chamber with the fluid.
17. The assay device of claim 16 comprising a sample shelf adjacent to the fluid entrance, wherein the microspheres are disposed on the sample shelf.
18. The assay device of claim 16 wherein a plurality of smaller microspheres are labeled with at least one label are interspersed with a plurality of larger microspheres such that the smaller microspheres occupy the interstitial spacing between the larger microspheres and release the label into the fluid as the fluid flows through the interstitial spacing between the larger microspheres.
19. The assay device of claim 18 comprising a plurality of groups of smaller microspheres each impregnated with a different label and interspersed with the larger microspheres in separate zones of the larger microspheres.
20. The assay device of claim 14 in which the reagent is disposed in a strip adhered to an interior surface of the capillary chamber.
21. The assay device of claim 20 in which the reagent comprises at least one antibody printed or coated onto the interior surface of the capillary chamber.

09335732-061899

22. The assay device of claim 14 in which a plurality of reagents are disposed within the capillary chamber for conducting a plurality of assays on the fluid sample.
23. The assay device of claim 22 in which the reagents include proteins, antibodies, nucleic acids, lipids, steroids, heterocyclic compounds, drugs, or any combination thereof.
24. The assay device of claim 14 in which a plurality of capillary chambers are provided for conducting a plurality of assays on one or more fluid samples.
25. The assay device of claim 14 further comprising an analyzer for detecting a proportion of the reagent which binds to an analyte in the fluid sample.
26. The assay device of claim 25 further comprising a calibration strip for setting a baseline for calibration of the analyzer.
27. The assay device of claim 25 further comprising an indicator containing patient identification information to be associated with results of the assay.
28. The assay device of claim 27 in which the indicator comprises a bar code and the analyzer comprises a bar code reader.
29. The assay device of claim 25 in which the analyzer comprises a spectrometer.
30. The assay device of claim 25 wherein the analyzer is capable of transmitting data digitally over digital transmission systems.
31. The assay device of claim 25 comprising a mask for overlaying the biochip, the mask being transparent over the reagent and opaque over a portion of the biochip surrounding the reagent.

00335732-061899

32. A method of separating fluid from a biologic sample, the sample having a fluid component and a non-fluid component, the method comprising the steps of,

(a) bringing the sample into fluid communication with a plurality of microspheres disposed in abutting relation and forming therebetween a plurality of interstitial spaces which connect to comprise capillary channels, and

(b) collecting the fluid component as it is separated by capillary flow of the fluid component through the capillary channels.

33. The method of claim 32 wherein the biologic sample is blood and the fluid component is plasma.

34. The method of claim 33 further comprising the step of interspersing a plurality of smaller microspheres impregnated with at least one label with a plurality of larger microspheres such that the smaller microspheres occupy the interstitial spacing between the larger microspheres and release the label into the plasma as the plasma flows through the interstitial spacing between the larger microspheres.

35. The method of claim 33 in which a plurality of groups of smaller microspheres each impregnated with a different label are interspersed with the larger microspheres in separate zones of the larger microspheres.

36. The method of claim 33 wherein the microspheres are of different diameters.

37. The method of claim 33 wherein the microspheres are of substantially the same diameter.

38. The method of claim 33 wherein the microspheres are bundled in a fluid-permeable material.

39. The method of claim 33 wherein the microspheres are maintained in abutting relation by a surface tension of the plasma or by drying the microspheres.

09335732-061899

40. The method of claim 33 in which a fluid-conveying means is provided to convey the biologic sample into fluid communication with the microspheres.

41. A method of conducting an assay utilizing a device comprising a capillary chamber defined by first and second opposed surfaces spaced a capillary distance apart having a fluid entrance and at least one reagent disposed within the capillary chamber, comprising the steps of,

- (a) conveying a fluid sample into fluid communication with the fluid entrance such that the fluid sample is drawn into the capillary chamber by capillary action and reacts with the reagent, and
- (b) analyzing the reagent to determine whether the reagent binds to an analyte in the fluid sample.

42. The method of claim 41 further comprising the step of analyzing the reagent to determine a proportion of the reagent which binds to the sample.

43. The method of claim 42 further comprising the step of determining a volume of a fluid sample which substantially fills the capillary chamber from a known volume of the capillary chamber.

44. The method of claim 41 for analyzing a biologic sample, the sample having a fluid and a non-fluid component, in which a capillary filter comprising a plurality of microspheres arranged in abutting relation and forming interstitial spaces therebetween such that the interstitial spaces form a plurality of capillary channels, is disposed in fluid communication with the fluid entrance to the capillary chamber, including the step of separating the fluid and non-fluid components of the biologic sample by capillary flow of the fluid component through the capillary channels.

45. The method of claim 44 wherein the biologic sample is blood and the fluid component is plasma.

46. The method of claim 41 in which the reagent is disposed in a strip adhered to an interior surface of the capillary chamber.

09335732-061899
668790-2E/5EE60

47. The method of claim 46 in which the reagent comprises a selected antibody printed onto the interior surface of the capillary chamber.
48. The method of claim 46 in which a plurality of reagents are disposed within the capillary chamber for conducting a plurality of assays on the fluid sample.
49. The method of claim 47 in which the reagents include proteins and antibodies.
50. The method of claim 48 in which the reagents include proteins, antibodies, nucleic acids, lipids, steroids, heterocyclic compounds, drugs of abuse or any combination thereof.
51. The method of claim 41 in which a plurality of capillary chambers are provided for conducting a plurality of assays on one or more fluid samples.
52. The method of claim 41 further comprising the step of calibrating the analyzer utilizing a calibration strip imprinted on the biochip for setting a baseline.
53. The method of claim 41 further comprising the step of associating with results of the assay patient identification information contained in an indicator affixed to the biochip.
54. The method of claim 53 in which the indicator comprises a bar code.
55. The method of claim 41 further comprising the step of recording results of the assay in a computer database.
56. The method of claim 55 further comprising the step of compiling data from a plurality of assays in the database.
57. The method of claim 55 further comprising the step of applying a trained neural network algorithm to the data to generate a profile of one or more selected disorders.

09335732.061899

58. The method of claim 56 further comprising the step of applying a receiver operating characteristic analysis to the data to determine a statistical significance of the data.

59. The method of claim 57 further comprising the step of applying a receiver operating characteristic analysis to the data to determine a statistical significance of the data.

60. The method of claim 41 further comprising, before the step of analyzing the reagent to determine whether the reagent binds to an analyte in the fluid sample, the step of removing the fluid sample from the capillary chamber after a desired time interval.

61. The method of claim 60 in which a wick or a capillary is brought into fluid communication with the fluid sample to remove the fluid sample from the capillary chamber.

62. A method of analyzing for an analyte in a fluid component of a biologic sample, the sample having a fluid component and a non-fluid component, the method comprising the steps of,

- (a) bringing the sample into fluid communication with a capillary filter, the capillary filter comprising a plurality of microspheres disposed in abutting relation and forming therebetween a plurality of interstitial spaces which connect to comprise capillary channels, thereby separating the fluid component from the non-fluid component,
- (b) detecting the analyte in the fluid component if the analyte is present,
- (c) bringing the fluid component into contact with a nitrocellulose chromatography strip for separation on the nitrocellulose chromatography strip.

00335732.061899

63. The method according to claim 62 wherein the analyte is detected in step (b) by bringing the fluid component into fluid communication with a nitrocellulose strip, wherein the nitrocellulose strip is impregnated with an analyte specific label, the label binding to analyte present in the fluid component of the sample.

64. The method according to claim 62 wherein the analyte is detected in step (b) by bringing the fluid component into fluid communication with a second group of microspheres, the second group of microspheres are impregnated with an analyte specific label, the label binding to analyte present in the fluid component of the sample.

09335732:061899

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR UTILITY PATENT APPLICATION**

Attorney's Docket No.
032724-001

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name:

I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (if only one name is listed below) OR AN ORIGINAL, FIRST AND JOINT INVENTOR (if more than one name is listed below) OF THE SUBJECT MATTER WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

DEVICE AND METHOD FOR ANALYZING A BIOLOGIC SAMPLE

the specification of which

(check one)

☒ is attached hereto:

☐ was filed on _____ as

Application No. _____

and was amended on _____
(if applicable)

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE;

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE OFFICE ALL INFORMATION KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, Sec. 1.56 (as amended effective March 18, 1972);

I do not know and do not believe the said invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to said application; that said invention was not in public use or on sale in the United States of America more than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States of America on any application filed by me or my legal representatives or assigns more than twelve months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code Sec. 119 and/or Sec. 363 of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application(s) on which priority is claimed:

09335732-061899

COMBINED DECLARATION AND POWER OF ATTORNEY			Attorney's Docket No. 032728-001
COUNTRY/INTERNATIONAL	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
CANADA	2,354,223	16 November 1988	YES X NO
			YES NO

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected herewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Martin Peter M. Smith Robert S. Swenson Robert M. Manning Robert H. Furtman, Jr. Norman K. Shapiro Ronald L. Greenblatt Frederick G. McKeown, Jr. Alan E. Knapold Regis E. Smith Robert G. Smith, III Ralph L. Woodland, Jr. Robert G. Smith George A. Brown, Jr.	James A. LeDare E. Joseph Goss R. Duane Thompson Eric H. Whitham James W. Parsons Thomas Stuart Ross Robert E. Krich William C. Rowland T. Glen Dickinson Patrick C. Keane Bruce J. Rogers, Jr. William E. Lane Peter K. Sibley Richard J. McKeown	22,527 22,528 22,529 22,530 22,531 22,532 22,533 22,534 22,535 22,536 22,537 22,538 22,539 22,540 22,541 22,542 22,543 22,544 22,545 22,546 22,547 22,548 22,549 22,550 22,551 22,552 22,553 22,554 22,555 22,556 22,557 22,558 22,559 22,560 22,561 22,562 22,563 22,564 22,565 22,566 22,567 22,568 22,569 22,570 22,571 22,572 22,573 22,574 22,575 22,576 22,577 22,578 22,579 22,580 22,581 22,582 22,583 22,584 22,585 22,586 22,587 22,588 22,589 22,590 22,591 22,592 22,593 22,594 22,595 22,596 22,597 22,598 22,599 22,600 22,601 22,602 22,603 22,604 22,605 22,606 22,607 22,608 22,609 22,610 22,611 22,612 22,613 22,614 22,615 22,616 22,617 22,618 22,619 22,620 22,621 22,622 22,623 22,624 22,625 22,626 22,627 22,628 22,629 22,630 22,631 22,632 22,633 22,634 22,635 22,636 22,637 22,638 22,639 22,640 22,641 22,642 22,643 22,644 22,645 22,646 22,647 22,648 22,649 22,650 22,651 22,652 22,653 22,654 22,655 22,656 22,657 22,658 22,659 22,660 22,661 22,662 22,663 22,664 22,665 22,666 22,667 22,668 22,669 22,670 22,671 22,672 22,673 22,674 22,675 22,676 22,677 22,678 22,679 22,680 22,681 22,682 22,683 22,684 22,685 22,686 22,687 22,688 22,689 22,690 22,691 22,692 22,693 22,694 22,695 22,696 22,697 22,698 22,699 22,700 22,701 22,702 22,703 22,704 22,705 22,706 22,707 22,708 22,709 22,710 22,711 22,712 22,713 22,714 22,715 22,716 22,717 22,718 22,719 22,720 22,721 22,722 22,723 22,724 22,725 22,726 22,727 22,728 22,729 22,730 22,731 22,732 22,733 22,734 22,735 22,736 22,737 22,738 22,739 22,740 22,741 22,742 22,743 22,744 22,745 22,746 22,747 22,748 22,749 22,750 22,751 22,752 22,753 22,754 22,755 22,756 22,757 22,758 22,759 22,760 22,761 22,762 22,763 22,764 22,765 22,766 22,767 22,768 22,769 22,770 22,771 22,772 22,773 22,774 22,775 22,776 22,777 22,778 22,779 22,780 22,781 22,782 22,783 22,784 22,785 22,786 22,787 22,788 22,789 22,790 22,791 22,792 22,793 22,794 22,795 22,796 22,797 22,798 22,799 22,800 22,801 22,802 22,803 22,804 22,805 22,806 22,807 22,808 22,809 22,810 22,811 22,812 22,813 22,814 22,815 22,816 22,817 22,818 22,819 22,820 22,821 22,822 22,823 22,824 22,825 22,826 22,827 22,828 22,829 22,830 22,831 22,832 22,833 22,834 22,835 22,836 22,837 22,838 22,839 22,840 22,841 22,842 22,843 22,844 22,845 22,846 22,847 22,848 22,849 22,850 22,851 22,852 22,853 22,854 22,855 22,856 22,857 22,858 22,859 22,860 22,861 22,862 22,863 22,864 22,865 22,866 22,867 22,868 22,869 22,870 22,871 22,872 22,873 22,874 22,875 22,876 22,877 22,878 22,879 22,880 22,881 22,882 22,883 22,884 22,885 22,886 22,887 22,888 22,889 22,890 22,891 22,892 22,893 22,894 22,895 22,896 22,897 22,898 22,899 22,900 22,901 22,902 22,903 22,904 22,905 22,906 22,907 22,908 22,909 22,910 22,911 22,912 22,913 22,914 22,915 22,916 22,917 22,918 22,919 22,920 22,921 22,922 22,923 22,924 22,925 22,926 22,927 22,928 22,929 22,930 22,931 22,932 22,933 22,934 22,935 22,936 22,937 22,938 22,939 22,940 22,941 22,942 22,943 22,944 22,945 22,946 22,947 22,948 22,949 22,950 22,951 22,952 22,953 22,954 22,955 22,956 22,957 22,958 22,959 22,960 22,961 22,962 22,963 22,964 22,965 22,966 22,967 22,968 22,969 22,970 22,971 22,972 22,973 22,974 22,975 22,976 22,977 22,978 22,979 22,980 22,981 22,982 22,983 22,984 22,985 22,986 22,987 22,988 22,989 22,990 22,991 22,992 22,993 22,994 22,995 22,996 22,997 22,998 22,999 23,000 23,001 23,002 23,003 23,004 23,005 23,006 23,007 23,008 23,009 23,010 23,011 23,012 23,013 23,014 23,015 23,016 23,017 23,018 23,019 23,020 23,021 23,022 23,023 23,024 23,025 23,026 23,027 23,028 23,029 23,030 23,031 23,032 23,033 23,034 23,035 23,036 23,037 23,038 23,039 23,040 23,041 23,042 23,043 23,044 23,045 23,046 23,047 23,048 23,049 23,050 23,051 23,052 23,053 23,054 23,055 23,056 23,057 23,058 23,059 23,060 23,061 23,062 23,063 23,064 23,065 23,066 23,067 23,068 23,069 23,070 23,071 23,072 23,073 23,074 23,075 23,076 23,077 23,078 23,079 23,080 23,081 23,082 23,083 23,084 23,085 23,086 23,087 23,088 23,089 23,090 23,091 23,092 23,093 23,094 23,095 23,096 23,097 23,098 23,099 23,100 23,101 23,102 23,103 23,104 23,105 23,106 23,107 23,108 23,109 23,110 23,111 23,112 23,113 23,114 23,115 23,116 23,117 23,118 23,119 23,120 23,121 23,122 23,123 23,124 23,125 23,126 23,127 23,128 23,129 23,130 23,131 23,132 23,133 23,134 23,135 23,136 23,137 23,138 23,139 23,140 23,141 23,142 23,143 23,144 23,145 23,146 23,147 23,148 23,149 23,150 23,151 23,152 23,153 23,154 23,155 23,156 23,157 23,158 23,159 23,160 23,161 23,162 23,163 23,164 23,165 23,166 23,167 23,168 23,169 23,170 23,171 23,172 23,173 23,174 23,175 23,176 23,177 23,178 23,179 23,180 23,181 23,182 23,183 23,184 23,185 23,186 23,187 23,188 23,189 23,190 23,191 23,192 23,193 23,194 23,195 23,196 23,197 23,198 23,199 23,200 23,201 23,202 23,203 23,204 23,205 23,206 23,207 23,208 23,209 23,210 23,211 23,212 23,213 23,214 23,215 23,216 23,217 23,218 23,219 23,220 23,221 23,222 23,223 23,224 23,225 23,226 23,227 23,228 23,229 23,230 23,231 23,232 23,233 23,234 23,235 23,236 23,237 23,238 23,239 23,240 23,241 23,242 23,243 23,244 23,245 23,246 23,247 23,248 23,249 23,250 23,251 23,252 23,253 23,254 23,255 23,256 23,257 23,258 23,259 23,260 23,261 23,262 23,263 23,264 23,265 23,266 23,267 23,268 23,269 23,270 23,271 23,272 23,273 23,274 23,275 23,276 23,277 23,278 23,279 23,280 23,281 23,282 23,283 23,284 23,285 23,286 23,287 23,288 23,289 23,290 23,291 23,292 23,293 23,294 23,295 23,296 23,297 23,298 23,299 23,300 23,301 23,302 23,303 23,304 23,305 23,306 23,307 23,308 23,309 23,310 23,311 23,312 23,313 23,314 23,315 23,316 23,317 23,318 23,319 23,320 23,321 23,322 23,323 23,324 23,325 23,326 23,327 23,328 23,329 23,330 23,331 23,332 23,333 23,334 23,335 23,336 23,337 23,338 23,339 23,340 23,341 23,342 23,343 23,344 23,345 23,346 23,347 23,348 23,349 23,350 23,351 23,352 23,353 23,354 23,355 23,356 23,357 23,358 23,359 23,360 23,361 23,362 23,363 23,364 23,365 23,366 23,367 23,368 23,369 23,370 23,371 23,372 23,373 23,374 23,375 23,376 23,377 23,378 23,379 23,380 23,381 23,382 23,383 23,384 23,385 23,386 23,387 23,388 23,389 23,390 23,391 23,392 23,393 23,394 23,395 23,396 23,397 23,398 23,399 23,400 23,401 23,402 23,403 23,404 23,405 23,406 23,407 23,408 23,409 23,410 23,411 23,412 23,413 23,414 23,415 23,416 23,417 23,418 23,419 23,420 23,421 23,422 23,423 23,424 23,425 23,426 23,427 23,428 23,429 23,430 23,431 23,432 23,433 23,434 23,435 23,436 23,437 23,438 23,439 23,440 23,441 23,442 23,443 23,444 23,445 23,446 23,447 23,448 23,449 23,450 23,451 23,452 23,453 23,454 23,455 23,456 23,457 23,458 23,459 23,460 23,461 23,462 23,463 23,464 23,465 23,466 23,467 23,468 23,469 23,470 23,471 23,472 23,473 23,474 23,475 23,476 23,477 23,478 23,479 23,480 23,481 23,482 23,483 23,484 23,485 23,486 23,487 23,488 23,489 23,490 23,491 23,492 23,493 23,494 23,495 23,496 23,497 23,498 23,499 23,500 23,501 23,502 23,503 23,504 23,505 23,506 23,507 23,508 23,509 23,510 23,511 23,512 23,513 23,514 23,515 23,516 23,517 23,518 23,519 23,520 23,521 23,522 23,523 23,524 23,525 23,526 23,527 23,528 23,529 23,530 23,531 23,532 23,533 23,534 23,535 23,536 23,537 23,538 23,539 23,540 23,541 23,542 23,543 23,544 23,545 23,546 23,547 23,548 23,549 23,550 23,551 23,552 23,553 23,554 23,555 23,556 23,557 23,558 23,559 23,560 23,561 23,562 23,563 23,564 23,565 23,566 23,567 23,568 23,569 23,570 23,571 23,572 23,573 23,574 23,575 23,576 23,577 23,578 23,579 23,580 23,581 23,582 23,583 23,584 23,585 23,586 23,587 23,588 23,589 23,5
---	---	--

668T90-2E/5EE60

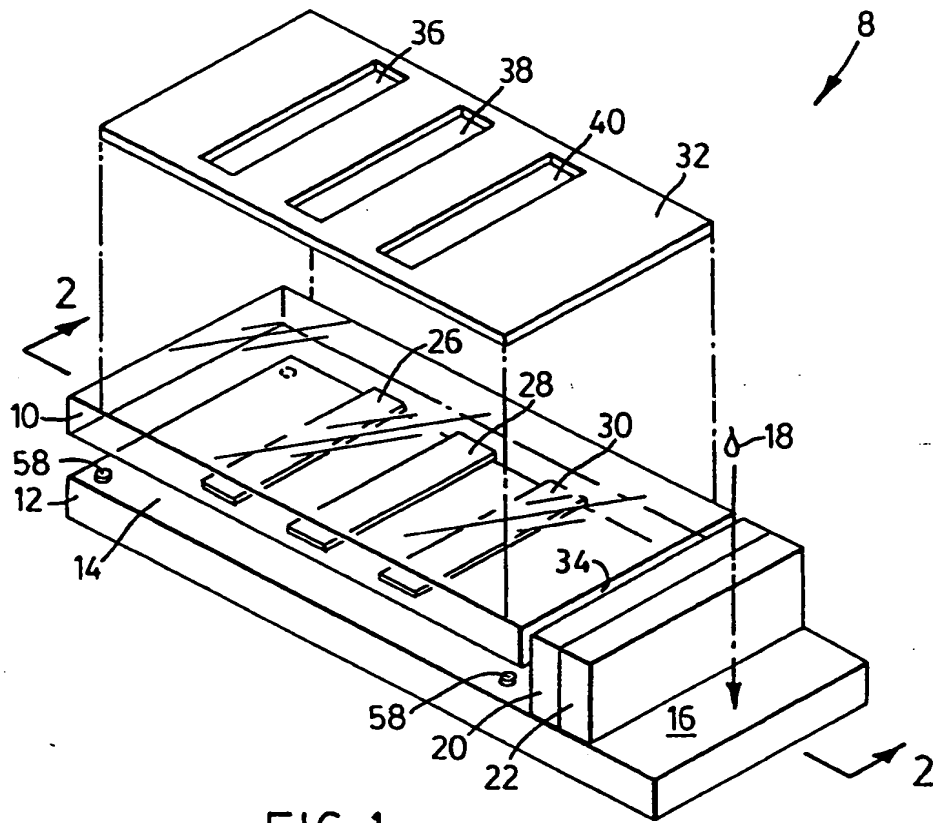


FIG. 1

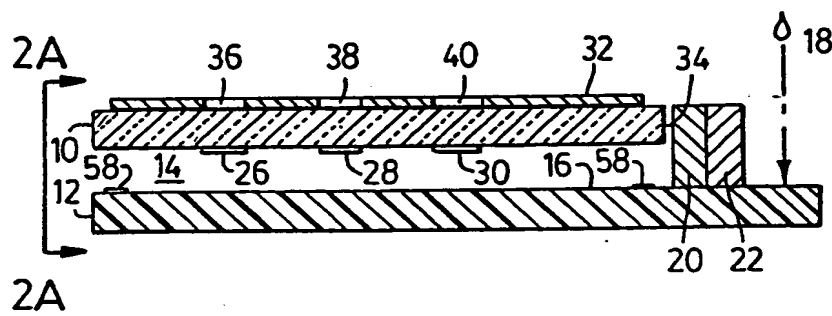


FIG. 2

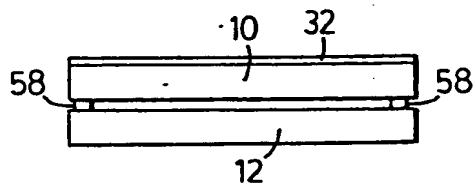


FIG. 2A

09335732-061899

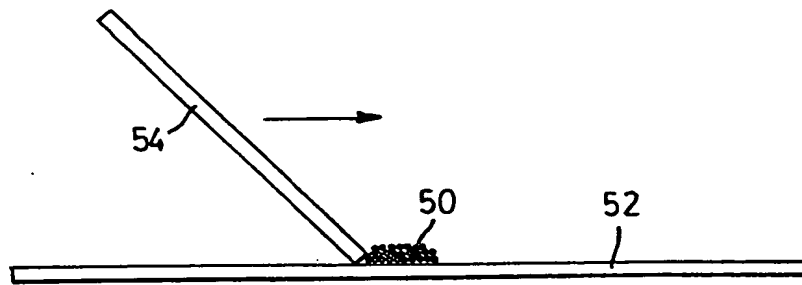


FIG. 3

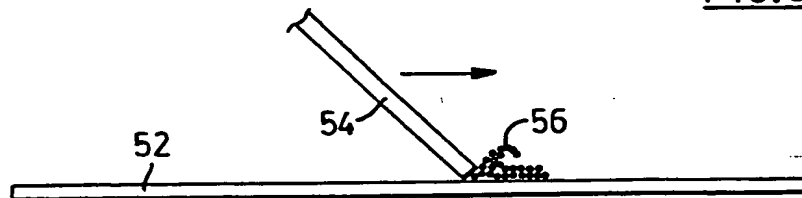


FIG. 4




FIG. 5

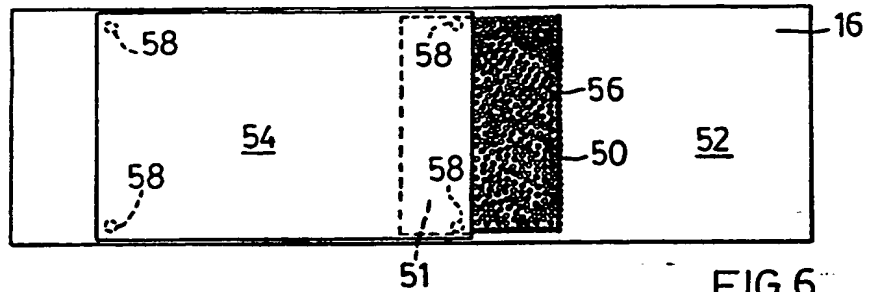


FIG. 6



FIG. 7





FIG. 7a

0055730-2E/5EE60

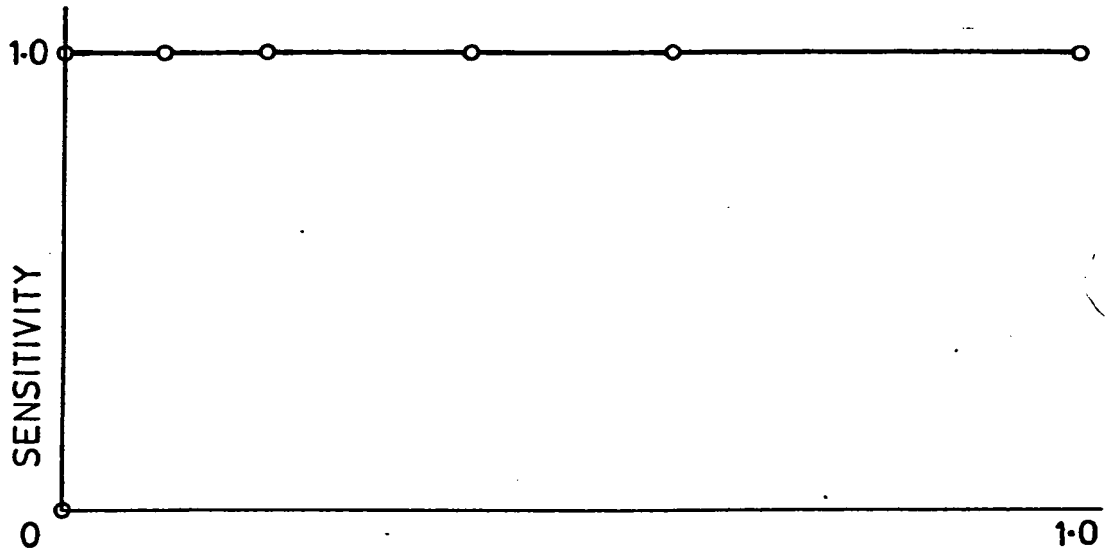

1 - SPECIFICITY
AREA UNDER CURVE # 1 : 1.00

FIG. 8